



PROFITEC

MADE IN GERMANY

 **AL PAINTURA**

EXCLUSIVE DISTRIBUTOR OF PROFITEC

✉ CEO@ALPAINTURA.AE

☎ +971 55 129 9790

🌐 WWW.ALPAINTURA.AE



AL PAINTURA

Al Paintura Global Paints Trading LLC is the exclusive distributor of PROFITEC in UAE, Saudi Arabia, Qatar and Bahrein.

THE PROFITEC BRAND

PROFITEC is a brand of the Meffert AG group of companies. With over 1,500 employees at more than 20 international locations, we develop and produce innovative paints, varnishes, glazes, plasters, and building protection products that are often ahead of their time.

Since its introduction in 1999, the PROFITEC brand has focused on Meffert AG's core competencies—innovative solutions with modern technologies and a trend towards advanced, environmentally friendly products. This painter's brand offers a wide, coordinated range exclusively to wholesalers, providing comprehensive expertise from a single source to support professional users successfully in their everyday work. Multiple production sites in Germany ensure smooth logistics and production processes.

CONTENTS

INTERIOR PAINTS 6

P 135 KERAPAIN CLASSIC	8
P 144 MATT PLUS	10
P 120 SUPERWEISS	12
P 154 SAMLATEX 10	14
P 118 RAPID WEISS	16
P 115 MALERWEISS HD	18
P 113 TRENDWEISS	20
P 101 VOLLTONFARBE SCHWARZ	22

EXTERIOR PAINTS

24

P 413 TRIBRID SILICONE	26
P 407 ACRYLOSAN	28
P 236 UNIVERSAL-HAUSFARBE FA	30

PRIMERS

32

P817 4IN1 PRIMER	34
P 805 GRUNDIERKONZENTRAT 1:7	36
P 818 GRUNDIERFARBE WP	38

INTERIOR PAINTS



P 135 KERAPAIN CLASSIC

**HIGH PERFORMANCE WALL AND CEILING FINISH
WITH CERAMIC TECHNOLOGY**



APPLICATION AREA

High-quality and solvent-free interior paint with the latest binder technology with ceramic microparticles. Ideal for a modern, smooth and silk-matt surface finishing. The paint levels the substrate, has a long opening time, excellent flow characteristics and dries seamless. Its extreme cleanability and resistance to disinfectant is proved by the German TÜV. Especially applicable for areas which have a higher demand with regard to the cleanability and resistance to disinfectant, for example: commercial and office buildings, public buildings, schools, sports grounds etc. Free from fogging-active substances. Applicable for rooms where food is produced or stored.

PRODUCT PROPERTIES

- Harmless to the indoor air quality with TÜV certificate
- Excellent cleanability with TÜV certificate
- Resistant to conventional solvent-free household detergents
- Applicable for rooms where food is produced or stored
- Noble, silk-matt surface finish
- Excellent adhesion properties
- Good work property with a very long opening time and excellent flow characteristics
- Repairable
- Diffusible, value of vapour permeability < 0,25m
- Free from fogging-active substances
- Water-dilutable and low in odor

Wet
abrasion
Class
1

Hiding
power Class
1

Yield
6
m²/l

GLOSS LEVEL: Dull matt

COLOUR SHADE: White

TRADING UNIT SIZES: 5.0L / 12.5L

PROCESSING

APPLICATION PROCEDURE

Application by brush or roller with (pile height 9 mm). To achieve all demanded properties, 2 coats (best application method: cross coat) are required.

COATING BUILD-UP

Apply to even coatings. Dilute the prime coat with ProfiTec Kera-Paint Classic P135 with a maximum of 20% water.

Dilute the final coat with ProfiTec KeraPaint Classic P135 with a maximum of 5% water, depending on the absorbance of the sub-strate.

In the case the dilution is too high, some properties such as coverage, color shade, color retention etc. might be affected.

When repairing the surface the same material/tool with the identical consistency/type of the final coat are to be used.

APPLICATION TEMPERATURE

At min. +5°C for object and surrounding area during the application and drying.

At + 20°C and max. 60% rel. air humidity Recoatable: after approx. 8 hours

At lower temperatures and higher air humidity, the drying time can take longer.

CONSUMPTION

With 2 coats on smooth, slightly porous substrates: approx. 200 ml/m² (intermediate coat diluted with 20% water, final coat diluted with 5% water). On rough substrates considerably more. Determine the precise quantities by sample coating.

DILUTION

Dilute with a maximum of 20% water.



DRYING TIME

Remark: The best possible cleanability is achieved after the coat is completely dried.



P 144 MATT PLUS

PERFECT FOR STRONG GRAZING LIGHT



APPLICATION AREA

For renovation and new coatings in the entire living and working area with increased stress. Suitable for all interior substrates such as plasters of mortar groups P II and P III, gypsum plasters of mortar group P IV, concrete/fiber cement boards, gypsum plasterboards, glass fabrics, glass and cellulose fleeces, woodchip as well as textured or paper wallpapers and for recoating intact old dispersion-based coatings.

PRODUCT PROPERTIES

- Fastest processing
- Longest open time
- Best repair
- Tested resistant to disinfectants
- For inside
- With 2 coats a perfect covering power and surface finish
- Processing without build-up due to long open time even with large areas lying together
- Diffusible
- Emission-minimized, solvent- and plasticizer-free
- Water dilutable and low odour
- Free of fogging active substances

Wet
abrasion
Class
1

Hiding
power Class
1

Yield
6
m²/l

STANDARDS / CERTIFICATES / EXTERNAL AUDITS:

- Certified by TÜV Rheinland "Emissionsgeprüft"
- Tested resistance to aqueous disinfectants
- Tested by TÜV Rheinland "Suitability for use in rooms where food is processed or stored"

GLOSS LEVEL:
Dull matt

COLOUR SHADE:
White, Base 2, Base 3

TRADING UNIT SIZES:
1.0L / 2.5L / 5.0L / 12.5L

PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard processing for roller application, we recommend an inner paint roller with 12 mm pile height.

For the best possible surface finish on smooth surfaces, we recommend to use a suitable paint roller for smooth surfaces. This reduces the risk of surface texture, formation of stripes and a top sheen. Always consider that this leads to less material applied on the surface which might weaken the hiding power.

To avoid visible joints, apply wet in wet. The areas painted with a brush should be well coated, finally the surface should be rolled out in one direction.

Spray application

Adjust material to spray viscosity. Observe the information provided by the device manufacturer. For an even surface finish, we recommend to roll out the surface.

Airless spraying: Spray angle: 50°; Nozzle: 0.018 - 0.021"; Spray pressure: 120-180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment". In most cases and on surfaces without strong colour contrasts, a single coat of undiluted paint is sufficient for the recoating.

In critical and difficult lighting conditions (grazing light), we recommend two coats for optimum finishing results.

Intercoating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on application and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties (e.g. hiding power, colour, resistance) may be impaired.
- Wet-on-wet coating is recommended to avoid the formation of stripes.
When painting with a brush, the painted area should be well coated.
Finally, roll out the surface in one direction after the last application.
- Observe sufficient drying time between coatings.
- Immediately wash off any material splashes with clean water.
- All adjacent building and plant components, e.g. fixtures, floors, railings, doors, windows, etc., must be protected by careful covering measures.
- On contiguous surfaces, use only material from one production (batch).

CONSUMPTION

Approx. 165 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. The exact consumption values are to be determined by a test coating. Consumption may vary depending on the absorbency of the substrate and application method.

DILUTION

With max. 5% water.

DRYING TIME

At +20°C and 65% relative humidity:

Overpaintable after approx. 4 hours

Drythrough after approx. 4 days

These times change at lower temperatures and/or higher humidity.



www.alpintura.de

P 120 SUPERWEISS

THE INTERIOR PAINT WITH BEST HIDING POWER



APPLICATION AREA

For renovation and new coatings in the entire living and working area with increased stress. Suitable for all indoor substrates such as plaster of mortar groups P II and P III, gypsum plaster of mortar group P IV, concrete/fibre cement boards, gypsum plasterboard, glass fabric, woodchip wallpaper as well as textured wallpaper made of vinyl foam or paper and for overpainting intact old dispersion-based coatings.

PRODUCT PROPERTIES

- Excellent workmanship
- High degree of whiteness structurepreserving
- Tested resistant to disinfectants
- Full colour spectrum
- Uniform, noble surface appearance
- Diffusible
- Emission-minimized, solvent- and plasticizer-free
- Water dilutable and low odour
- Free of fogging active substances

Wet abrasion Class
1

Hiding power Class
1

Yield
8 m²/l

STANDARDS / CERTIFICATES / EXTERNAL AUDITS:

- Certified by TÜV Rheinland "Emissionsgeprüft"
- Tested resistance to aqueous disinfectants
- Tested by TÜV Rheinland "Suitability for use in rooms where food is processed or stored"

GLOSS LEVEL:
Dull matt

COLOUR SHADE:
White, Base 2, Base 3

TRADING UNIT SIZES:
1.0L / 2.5L / 5.0L / 12.5L

PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard processing for roller application, we recommend an inner paint roller with 12 mm pile height.

For the best possible surface finish on smooth surfaces, we recommend to use a suitable paint roller for smooth surfaces. This reduces the risk of surface texture, formation of stripes and a top sheen. Always consider that this leads to less material applied on the surface which might weaken the hiding power. To avoid visible joints, apply wet in wet. The areas painted with a brush should be well coated, finally the surface should be rolled out in one direction.

Spray application

Adjust material to spray viscosity. Observe the information provided by the device manufacturer. For an even surface finish, we recommend to roll out the surface.

Airless spraying: Spray angle: 50°; Nozzle: 0.018 - 0.021"; Spray pressure: 120-180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment".

In most cases and on surfaces without strong colour contrasts, a single coat of undiluted paint is sufficient for the recoating.

Intercoating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on application and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5 °C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties (e.g. hiding power, colour, resistance) may be impaired.
- Wet-on-wet coating is recommended to avoid the formation of stripes. When painting with a brush, the painted area should be well coated. Finally, roll out the surface in one direction after the last application.
- Wash off paint splashes immediately with clear water.
- Observe sufficient drying time between coatings.

CONSUMPTION

Approx. 125 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. Determine the exact consumption values by sample coating. Consumption may vary depending on the absorbency of the substrate and application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20°C and 65% relative humidity:

Overpaintable after approx. 4 hours


Drythrough after approx. 4 days

These times change at lower temperatures and/or higher humidity.



P 154 SAMTLATEX 10

SILK MATT INTERIOR LATEX PAINT

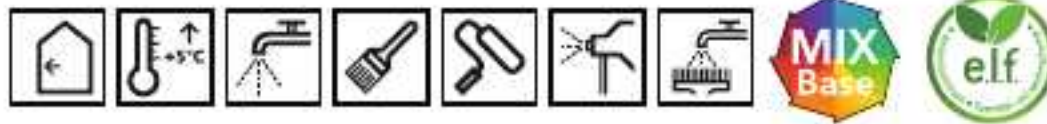

APPLICATION AREA

For renovation and new coatings in all living and working areas subject to increased stress. Suitable for all interior substrates such as plasters of mortar groups P II and P III, gypsum plasters of mortar group P IV, concrete/fiber cement boards, gypsum plasterboards, glass fabric, glass and cellulose fleece, woodchip as well as textured or paper wallpapers and for painting over intact old dispersion-based paints.

PRODUCT PROPERTIES

- Structure-preserving
- Easy to clean
- Tested resistant to disinfectants
- Even flow
- Diffusible
- Minimized emissions, free of solvents and plasticizers
- Water-dilutable and low odor
- Free from fogging-active substances

Wet
abrasion
Class
1

Hiding
power Class
2

Yield
7
m²/l

STANDARDS / CERTIFICATES / EXTERNAL AUDITS:

- Certified by TÜV Rheinland "Emissions tested"
- Tested resistance to aqueous disinfectants

GLOSS LEVEL:
Silk matt

COLOUR SHADE:
White, Base 2

TRADING UNIT SIZES:
1.0L / 5.0L / 12.5L

PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard roller application, we recommend using an interior paint roller with a pile height of 12 mm. For the best possible surface result on smooth substrates in roller application, we recommend using a suitable paint roller for smooth surfaces. This reduces the risk of surface structure, roller streaks and a shiny top. Coating should be carried out wet-on-wet to avoid build-up. Blend the areas painted with the brush well and then roll the surface in one direction.

Spray application

Adjust material to spray viscosity. Observe the appliance manufacturer's information. For an even surface finish, we recommend rolling the surface.

Spray angle: 50°; Nozzle: 0.018 - 0.021"; Spray pressure: 120-180 bar

COATING BUILD-UP

Prepare the substrate professionally. See chapter "Substrates and their pretreatment". In most cases, a single, undiluted coat is sufficient for recoating without large color contrasts.

Intercoating

On high-contrast surfaces, apply an intermediate coat, depending on the application and Dilute the substrate with max. 10% water.

Final coating

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties of the material may (e.g. hiding power, color shade, resistance).
- Coat wet on wet to avoid build-up. When applying with a brush, blend the painted area well. After the final application, roll the surface in one direction.
- Allow sufficient drying time between coats.
- Wash off material splashes immediately with clean water.
- All adjacent structural and plant components, e.g. furnishings, floors, railings, doors, windows, etc. must be protected by careful covering measures.
- Only use material from one production batch on contiguous surfaces.

CONSUMPTION

Approx. 145 ml/m² per coating on smooth, slightly absorbent substrates.

Correspondingly more on rough substrates. The exact consumption values must be determined by means of a test coating. Consumption may vary depending on the absorbency of the substrate and the application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20 °C and 65 % relative humidity:

Can be painted over after approx. 4 hours


Completely dry after approx. 4 days

At lower temperatures and/or higher humidity levels, the these times.



P 118 RAPID WEISS

SINGLE-LAYER INTERIOR PAINT

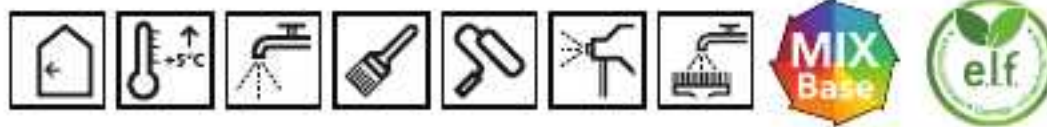

APPLICATION AREA

For renovation and new coatings in the entire living and working area with increased stress. Suitable for all interior substrates such as plasters of mortar groups P II and P III, gypsum plasters of mortar group P IV, concrete/fiber cement boards, gypsum plasterboards, glass fabrics, glass and cellulose fleeces, woodchip as well as textured or paper wallpapers and for recoating intact old dispersion-based coatings.

PRODUCT PROPERTIES

- Excellent workmanship
- Ideal for all purposes
- First-class hiding power
- Uniform surface finish
- Diffusible
- Emission-minimized, solvent- and plasticizer-free
- Free of fogging active substances
- Water dilutable and low odour

Wet
abrasion
Class
2

Hiding
power Class
1

Yield
8
m²/l

STANDARDS / CERTIFICATES / EXTERNAL AUDITS:

- Certified by TÜV Rheinland "Emissionsgeprüft"
- Tested by TÜV Rheinland "Suitability for use in rooms where food is processed or stored"
- Tested resistance to aqueous disinfectants

GLOSS LEVEL:
Dull matt

COLOUR SHADE:
White, Base 2, Base 3

TRADING UNIT SIZES:
5.0L / 12.5L / 15.0L / 40.0KG / 1.0L / 2.5L

PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard processing for roller application, we recommend an inner paint roller with 12 mm pile height. For the best possible surface finish on smooth surfaces, we recommend to use a suitable paint roller for smooth surfaces. This reduces the risk of surface texture, formation of stripes and a top sheen. Always consider that this leads to less material applied on the surface which might weaken the hiding power. To avoid visible joints, apply wet in wet. The areas painted with a brush should be well coated, finally the surface should be rolled out in one direction.

Spray application

Adjust material to spray viscosity. Observe the information provided by the device manufacturer. For an even surface finish, we recommend to roll out the surface.

Airless spraying: Spray angle: 50°; Nozzle: 0.018 – 0.021";
Spray pressure: 120 – 180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment".

In most cases and on surfaces without strong colour contrasts, a single coat of undiluted paint is sufficient for the recoating.

Intercoating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on application and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties (e.g. hiding power, colour, resistance) may be impaired.
- Wet-on-wet coating is recommended to avoid the formation of stripes.
When painting with a brush, the painted area should be well coated.
Finally, roll out the surface in one direction after the last application.
- Observe sufficient drying time between coatings.
- Immediately wash off any material splashes with clean water.
All adjacent building and plant components, e.g. fixtures, floors, railings, doors, windows, etc., must be protected by careful covering measures.
- On contiguous surfaces, use only material from one production (batch).

CONSUMPTION

Approx. 125 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. Consumption may vary depending on the absorbency of the substrate and application method. The exact consumption values are to be determined by a test coating.

DILUTION

With max. 10% water.

DRYING TIME

At +20°C and 65% relative humidity:

Overpaintable after approx. 4 hours






Drythrough after approx. 4 days

These times change at lower temperatures and/or higher humidity.



P 115 MALERWEISS HD

THE PAINT FOR EVERY DAY



APPLICATION AREA

For renovation and new coats in the entire living and working area with medium stress. Suitable for all interior substrates such as plasters of mortar groups P II and P III, gypsum plasters of mortar group P IV, concrete/fiber cement boards, gypsum plasterboards, glass fabrics, glass and cellulose fleeces, woodchip as well as textured or paper wallpapers and for recoating intact old dispersion-based coatings.

PRODUCT PROPERTIES

- For new and renovation coatings indoors
- Ideal on non-woven, fabric, plaster and woodchip wallpaper
- HighCoverage
- Very easy processing
- Full colour spectrum
- Emission-minimized, solvent- and plasticizer-free
- Water dilutable and low odour
- Diffusible
- Free of fogging active substances

Wet
abrasion
Class
2

Hiding
power Class
1

Yield
7
m²/l

STANDARDS / CERTIFICATES / EXTERNAL AUDITS:

- Certified by TÜV Rheinland "Emissionsgeprüft"
- Tested by TÜV Rheinland "Suitability for use in rooms where food is processed or stored"

GLOSS LEVEL:
Dull matt

COLOUR SHADE:
Base 3, White, Base 2, Old white

TRADING UNIT SIZES:
5.0L / 12.5L / 1.0L / 2.5L / 7.5L

PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard processing for roller application, we recommend an inner paint roller with 12 mm pile height. For the best possible surface finish on smooth surfaces, we recommend to use a suitable paint roller for smooth surfaces. This reduces the risk of surface texture, formation of stripes and a top sheen. Always consider that this leads to less material applied on the surface which might weaken the hiding power. To avoid visible joints, apply wet in wet. The areas painted with a brush should be well coated, finally the surface should be rolled out in one direction.

Spray application

Adjust material to spray viscosity. Observe the information provided by the device manufacturer. For an even surface finish, we recommend to roll out the surface.

Airless spraying: Spray angle: 50°; Nozzle: 0.018 - 0.021";
Spray pressure: 120-180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment".

In most cases and on surfaces without strong colour contrasts, a single coat of undiluted paint is sufficient for the recoating.

Intercoating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on application and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5 °C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties (e.g. hiding power, colour, resistance) may be impaired.
- Wet-on-wet coating is recommended to avoid the formation of stripes.
- When painting with a brush, the painted area should be well coated.
- Finally, roll out the surface in one direction after the last application.
- Observe sufficient drying time between coatings.
- Immediately wash off any material splashes with clean water.
- All adjacent building and plant components, e.g. fixtures, floors, railings, doors, windows, etc., must be protected by careful covering measures.
- On contiguous surfaces, use only material from one production (batch).

CONSUMPTION

Approx. 145 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. The exact consumption values are to be determined by a test coating. Consumption may vary depending on the absorbency of the substrate and application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20°C and 65% relative humidity:

Overpaintable after approx. 4 hours

Drythrough after approx. 4 days


These times change at lower temperatures and/or higher humidity.



www.alpintura.de

P 113 TRENDWEISS

MATT INTERIOR PAINT

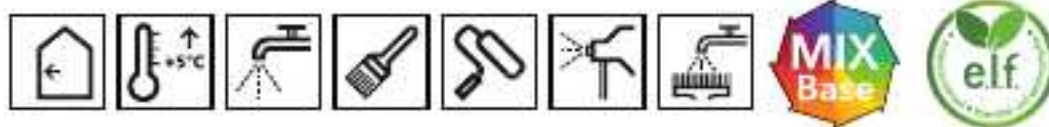

APPLICATION AREA

For renovation and new coatings in all living and working areas with light loads. Suitable for all interior substrates such as plasters of mortar groups P II and P III, gypsum plasters of mortar group P IV, concrete/fiber cement boards, plasterboard, glass fabric, glass and cellulose fleece, woodchip as well as textured or paper wallpapers and for painting over intact old dispersion-based paints.

PRODUCT PROPERTIES

- Versatile in use
- Easy processing
- Diffusible
- Minimized emissions, free of solvents and plasticizers
- Water-dilutable and low odor
- Free from fogging-active substances

Wet
abrasion
Class
3

Hiding
power Class
2

Yield
7
m²/l

STANDARDS / CERTIFICATES / EXTERNAL AUDITS:

- Certified by TÜV Rheinland "Emissionsgeprüft"
- Tested resistance to aqueous disinfectants
- Tested by TÜV Rheinland "Suitability for use in rooms where food is processed or stored"

GLOSS LEVEL:
Matt

COLOUR SHADE:
White, Base 2

TRADING UNIT SIZES:
1.0L / 2.5L / 5.0L / 7.5L / 12.5L

PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard processing in roll application, we recommend a Interior paint roller with 12 mm pile height.

Spray application

Adjust material to spray viscosity. Information from the device manufacturer note. For an even surface finish, we recommend the surface roll up.

Spray angle: 50°; Nozzle: 0.018 - 0.021"; Spray pressure: 120 - 180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their Pre-treatment".

In most cases, it is sufficient to rework the coating without great color contrasts a single coat, undiluted.

Intercoating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on the application and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5 °C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties of the material may (e.g. hiding power, color shade, resistance).
- Coat wet on wet to avoid build-up. When applying with a brush, blend the painted area well. After the final application, roll the surface in one direction.
- Allow sufficient drying time between coats.
- Wash off material splashes immediately with clean water.
- All adjacent structural and plant components, e.g. furnishings, floors, railings, doors, windows, etc. must be protected by careful covering measures.
- On contiguous surfaces only material of one production (batch) use.

CONSUMPTION

Approx. 145 ml/m² per coating on smooth, slightly absorbent substrates. Correspondingly more on rough substrates. The exact consumption values must be determined by means of a test coating. Consumption may vary depending on the absorbency of the substrate and the application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20 °C and 65% relative humidity:

Can be painted over after approx. 4 hours.


Completely dry after approx. 4 days.

At lower temperatures and/or higher humidity levels, the these times.



P 101 VOLLTONFARBE SCHWARZ

SILK MATTE INTERIOR COATING

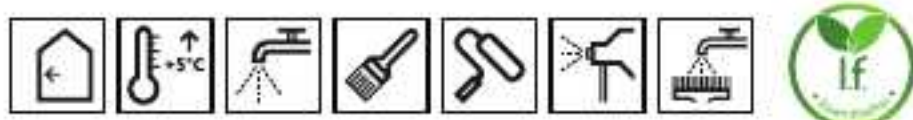

APPLICATION AREA

Solvent-free, black pigmented, silk-matt emulsion paint for interior use. For use as a "shadow color" of open and suspended ceiling and wall structures in sales or presentation rooms. Substrates such as concrete and cleaned zinc components (trapezoidal sheet metal, ventilation ducts, etc.) can be coated in one operation without primer. Suitable for all interior substrates such as plasters of mortar groups P II and P III, gypsum plasters of mortar group P IV, concrete/fiber cement boards, gypsum plasterboards, glass fabrics, glass and cellulose fleeces, woodchip as well as textured or paper wallpapers and for recoating intact old dispersion-based coatings.

PRODUCT PROPERTIES

- Wet abrasion R-class 1
- High hiding power
- High range
- High light absorption
- Silk-matt surface appearance depending on viewing angle and lighting conditions
- Easy processing
- Diffusible
- Water dilutable and low odour

GLOSS LEVEL:
Silk matt

COLOUR SHADE:
Black

TRADING UNIT SIZES:
12.5L



PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Roll application

For standard processing for roller application, we recommend an inner paint roller with 12 mm pile height. For the best possible surface finish on smooth surfaces, we recommend to use a suitable paint roller for smooth surfaces. This reduces the risk of surface texture, formation of stripes and a top sheen. Always consider that this leads to less material applied on the surface which might weaken the hiding power. To avoid visible joints, apply wet in wet. The areas painted with a brush should be well coated, finally the surface should be rolled out in one direction.

Spray application

Adjust material to spray viscosity. Observe the information provided by the device manufacturer. For an even surface finish, we recommend to roll out the surface.

Airless spraying: Spray angle: 50°; Nozzle: 0.018 – 0.021";
Spray pressure: 120 – 180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment".

In most cases and on surfaces without strong colour contrasts, a single coat of undiluted paint is sufficient for the recoating.

Intercoating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on application and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5 °C for object and ambient temperature during application and drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If the material is diluted too much, the properties (e.g. hiding power, colour, resistance) may be impaired.
- Wet-on-wet coating is recommended to avoid the formation of stripes.
When painting with a brush, the painted area should be well coated.
Finally, roll out the surface in one direction after the last application.
- Observe sufficient drying time between coatings.
- Immediately wash off any material splashes with clean water.
- All adjacent building and plant components, e.g. fixtures, floors, railings, doors, windows, etc., must be protected by careful covering measures.
- On contiguous surfaces, use only material from one production (batch).

CONSUMPTION

Approx. 145 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. The exact consumption values are to be determined by a test coating. Consumption may vary depending on the absorbency of the substrate and application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20°C and 65% relative humidity:

Overpaintable after approx. 4 hours

Drythrough after approx. 4 days

These times change at lower temperatures and/or higher humidity.



EXTERIOR PAINTS



P 413 TRIBRID SILICONE

3-FOLD FACADE PROTECTION THROUGH NANO-BINDER TECHNOLOGY



APPLICATION AREA

High-performance facade paint based on the latest nano-ceramic technology for perfect longterm protection with optimized color stability. For facade coatings on universal substrates such as organic and mineral renders and renovation coatings on stable old coatings such as emulsion, silicate and silicone-based coatings. Can also be used in the Fassade Solid Plus system for tints with HBW < 20 to prevent excessive heating of the facade surface in sunlight. Also ideal for intensive tinting in PROFITEC ETIC systems.

PRODUCT PROPERTIES

- Fastest re-drying
- Lowest soiling tendency
- Highest color stability
- Best building physics
- Long-term protection thanks to NanoTec

GLOSS LEVEL:
Matt

COLOUR SHADE:
White, Base 2, Base 3

TRADING UNIT SIZES:
1.0L / 5.0L / 12.5L



PROCESSING

APPLICATION PROCEDURE

By brushing or rolling as well as with the low-mist spray application and wearing personal protective equipment.

Roll application

Use a suitable facade roller.

Spray application

Spray angle: 50°; Nozzle: 0.018 - 0.026"; Spray pressure: 120 - 180 bar For low-mist spray application, devices or system components from different suppliers can be used. The processing instructions of the respective component supplier must be observed.

COATING BUILD-UP

Prepare the substrate professionally. See chapter "Substrates and their pretreatment".

Two coats of paint provide a high level of protection against organic infestation.

Intermediate coating

On high-contrast surfaces, apply an intermediate coat diluted with max. 10% water, depending on the application and substrate.

Final coating

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature for the Processing and during drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- Carefully cover the area around the surfaces to be coated, in particular glass, ceramics, paintwork, clinker, natural stone, metal and natural or glazed wood.
- Wash off material splashes immediately with clean water.
- If the material is diluted too much, the properties of the material may (e.g. hiding power, color shade, resistance).
- If algae or fungal infestation is present, the surfaces must first be cleaned by wet blasting in compliance with the statutory regulations.
- Allow sufficient drying time between coats.
- When coating, ensure that the material is applied and distributed evenly so that the layer thickness required for the protective effect is achieved.
- Do not apply in direct sunlight, rain, extremely high humidity (fog) or strong winds. If necessary, attach a net tarpaulin to the scaffolding. Take care if there is a risk of night frost.

CONSUMPTION

Approx. 170 ml/m² per coating on smooth, slightly absorbent substrates. Correspondingly more on rough substrates. The exact consumption values must be determined by means of a test coating. Consumption may vary depending on the nature and structure of the substrate and the application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20°C and 65% relative humidity:


Can be painted over after approx. 4 - 6 hours.

Completely dry after approx. 3 days.

These times change at lower temperatures and/or higher humidity.

P 407 ACRYLOSAN

**MATT PURE ACRYLIC SILICONE
RESIN FACADE PAINT**

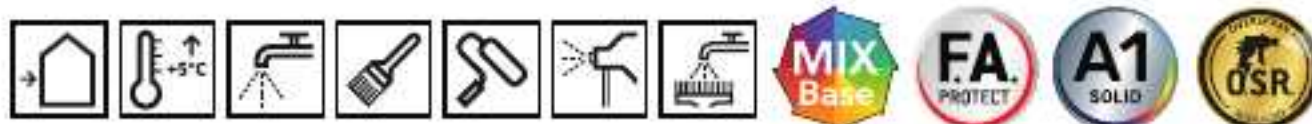

APPLICATION AREA

High-performance façade paint with innovative hybrid binder for outstanding façade protection with optimized color stability and excellent water vapour permeability, with preventive film protection (encapsulated) against algae and fungi. Can be used on mineral substrates and sound old coatings based on silicone, silicate and dispersion. Also ideal for intensive tinting in PROFITEC ETIC systems.

PRODUCT PROPERTIES

- Highest color stability
- Low soiling tendency
- Highly permeable
- Tested for DA1 RK system

GLOSS LEVEL:
Matt

COLOUR SHADE:
White, Base 2, Base 3

TRADING UNIT SIZES:
1.0L / 2.5L / 5.0L / 12.5L



PROCESSING

APPLICATION PROCEDURE

By brushing or rolling as well as with the low-mist spray application and wearing personal protective equipment.

Roll application

Use a suitable facade roller.

Airless spraying

Spray angle: 50°; Nozzle: 0.018-0.026"; Spray pressure: 120-180 bar

Devices or system components from various suppliers can be used for low-mist spray application. The processing instructions of the respective component supplier must be observed.

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their Pre-treatment".

To achieve the desired surface properties, it is necessary to apply two Coating required.

Intermediate coating

Diluted with max. 10% water depending on application and substrate execute.

Final coating

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature for the Processing and during drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- Carefully cover the area around the surfaces to be coated, in particular glass, ceramics, paintwork, clinker, natural stone, metal and natural or glazed wood.
- Wash off material splashes immediately with clean water.
- If the material is thinned too much, the properties can be (e.g. hiding power, color shade, resistance).
- If algae or fungal infestation is present, the surfaces must first be cleaned by wet blasting in compliance with the statutory regulations.
- When applying coats, ensure that the material is applied and distributed evenly to achieve the layer thickness required for the protective effect.
- Allow sufficient drying time between coats.
- Do not apply in direct sunlight, rain, extremely high humidity (fog) or strong winds. If necessary, attach a net tarpaulin to the scaffolding. Take care if there is a risk of night frost.

CONSUMPTION

Approx. 165 ml/m² per coating on smooth, slightly absorbent substrates. Correspondingly more on rough substrates. The exact consumption values must be determined by means of a test coating. Consumption may vary depending on the nature and structure of the substrate and the application method.

DILUTION

With max. 10% water.

DRYING TIME

At +20 °C and 65 % relative humidity:

Can be painted over after approx. 4 - 6 hours

Completely dry after approx. 3 days

At lower temperatures and/or higher humidity levels, the these times.



P 236 UNIVERSAL-HAUSFARBE FA

SILK MATT 100% PURE ACRYLIC FACADE PAINT



APPLICATION AREA

Film-protected, high-quality and highly opaque facade paint, universally applicable on many substrates such as: Old coatings, concrete, fiber cement, rigid PVC, non-dimensionally stable wooden components, non-ferrous metals and plaster(s) of mortar groups P II and P III. Due to the high CO₂ density, also ideal as a concrete protective coating.

PRODUCT PROPERTIES

- Versatile adhesion
- Tested CO₂-tightness
- Structure-preserving
- Film protection against algae and fungi

GLOSS LEVEL:
Silk matt

COLOUR SHADE:
White, Base 2, Base 3

TRADING UNIT SIZES:
1.0L / 5.0L / 12.5L



PROCESSING

APPLICATION PROCEDURE

Wear personal protective equipment when working with brush or roller as well as during low-emission spray application.

Roll application

Use a suitable facade roller.

Airless spraying

Spray angle: 50°; Nozzle: 0.018–0.026"; Spray pressure: 120–180 bar

For low-mist spray application, equipment or system components from different suppliers can be used. The processing instructions of the respective component supplier must be observed.

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment".

Two coats of paint provide a high protection against organic infestation.

Intercoating

Dilute with max. 10% water, depending on application method and substrate.

Top coat

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature for the Processing and during drying.

PROCESSING INFORMATION

- Stir well before use. The material can be diluted to adjust the consistency.
- If algae or fungi are present, the surfaces must first be cleaned by wet blasting in accordance with the statutory regulations.
- Carefully cover the surroundings of the areas to be coated. This applies in particular to glass, ceramics, paintwork, clinker, natural stone, metal and untreated or glazed wood.
- Immediately wash off any material splashes with clean water.
- Do not use in direct sunlight, rain, extremely high humidity (foggy wetness) or strong wind. If necessary, attach a net tarpaulin to the scaffold. Be careful if there is a risk of night frost.
- If the material is diluted too much, the properties (e.g. hiding power, colour, resistance) may be impaired.
- When painting, ensure that the material is applied and distributed evenly so that the layer thickness required for the insulation/protective effect is achieved.
- Observe sufficient drying time between coatings.

CONSUMPTION

Approx. 125 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. Consumption may vary depending on the nature and structure of the substrate and the application method. The exact consumption values are to be determined by a test coating.

DILUTION

With max. 10% water.

DRYING TIME

At +20 °C and 65 % relative humidity:

Overpaintable after approx. 4 – 6 hours

Dry through after approx. 3 days

These times change at lower temperatures and/or higher humidity.




www.alpintura.ae

PRIMERS



P817 4IN1 PRIMER

THE ALL-ROUND SPECIALIST



APPLICATION AREA

White pigmented primer with functional properties. Ideally suited for creating smooth wall surfaces. For leveling intact, highly absorbent old coatings. Can be used on all interior substrates such as mortar group II and III plasters, fiber cement and plasterboard, non-woven wallpaper, glass fabric, woodchip and textured wallpaper made of vinyl foam or paper.

PRODUCT PROPERTIES

- Primer and intermediate coat
- Increased grazing light safety and open time extension
- Extremely smooth finish
- Color equalizing
- For indoors

COLOUR SHADE:
White

TRADING UNIT SIZES:
12.5L



PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.

Airless spraying

Spray angle: 50°; Nozzle: 0.018 - 0.024"; Spray pressure: 120 - 180 bar

COATING BUILD-UP

Prepare the substrate professionally. See chapter "Substrates and their pretreatment". 1 coat

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature for the Processing and during drying.

PROCESSING INFORMATION

- Stir well before use.
- Coat wet on wet to avoid build-up. When applying with a brush, blend the painted area well. After the final application, roll the surface in one direction.
- Allow sufficient drying time between coats.

CONSUMPTION

Approx. 100 ml/m² per coating on smooth, slightly absorbent substrates. Correspondingly more on rough substrates. Consumption may vary depending on the nature and structure of the substrate and the application method. The exact consumption values must be determined by means of a test coating.

DILUTION

Prepared ready for use. Apply undiluted.

DRYING TIME

At +20°C and 65% relative humidity:

Can be painted over after approx. 4 hours.


These times change at lower temperatures and/or higher humidity.



www.alpintura.ae

P 805 GRUNDIER-KONZENTRAT 1:7

HIGHLY CONCENTRATED PRIMER

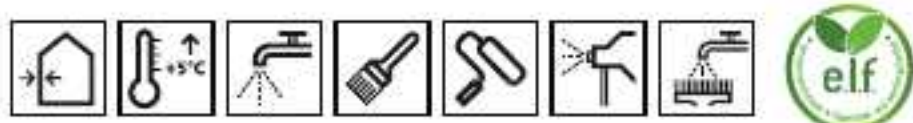

APPLICATION AREA

Transparent drying concentrate with maximum dilution reserve, for deep priming and solidifying highly or differently absorbent, sanding substrates. Suitable are plasters of mortar group P II and P III, gypsum plasters of mortar group P IV, concrete/fibre cement boards, gypsum construction and gypsum plasterboard, lime sand brick, brick and hard branded brick, concrete and aerated concrete as well as slightly chalking but stable old paints.

PRODUCT PROPERTIES

- Deep penetration
- High solidifying
- Can be diluted up to 1:7 with water
- For inside and outside

COLOUR SHADE:
Transparent

TRADING UNIT SIZES:
5.0L / 10.0L



PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or airless spray application.

Airless spraying

Spray angle: 30°; Nozzle: 0.009" – 0.011"; Spray pressure: 70 – 90 bar

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature for the Processing and during drying.

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment".

Depending on the absorbency of the substrate, apply the coating diluted with water up to max. 1:7.

On highly absorbent or slightly sandy substrates, apply the material wet-on-wet until fully saturated. Repeated priming may be necessary to obtain evenly absorbent surfaces.

PROCESSING INFORMATION

- Shake well before use.
- The amount of water added depends on the absorbency of the substrate.
- If the material is diluted too much, the characteristics can be impaired.
- In order to achieve optimum substrate properties, it is recommended to use a brush.
- While drying, no closed, glossy surfaces should occur during drying, as these may interfere with the adhesive bond for subsequent coatings.
- Dried runners can also have optical impairments after being coated with dispersion paint.
- Observe sufficient drying time between coatings.

CONSUMPTION

Approx. 50 – 200 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. Consumption may vary depending on the nature and structure of the substrate and the application method. The exact consumption values are to be determined by a test coating.

DILUTION

With max. 7 parts water (ratio 1:7).

DRYING TIME

At +20°C and 65 % relative humidity:

Overpaintable after approx. 6-8 hours


These times change at lower temperatures and/or higher humidity.



www.alpintura.ae

P 818 GRUNDIER-FARBE

HIGHLY CONCENTRATED PRIMER

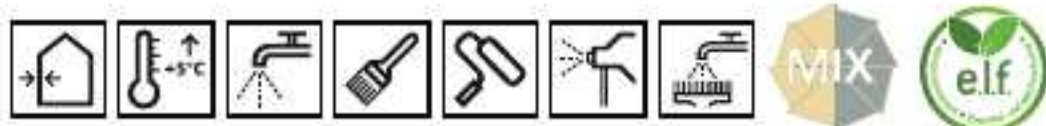

APPLICATION AREA

Solvent-free, white pigmented special primer for opaque, smooth priming and adhesion promoting coatings. Can be used on mineral and old dispersion coatings before subsequent top coats with emulsion, silicate and silicone resin emulsion paints. Indoors also for adhesion promotion on smooth substrates such as gypsum plasters, gypsum plasterboard, gypsum plasterboards and concrete.

PRODUCT PROPERTIES

- Finely filled
- Adhesion promoter on non-siliceable substrates for dispersion silicate products
- White pigmented

COLOUR SHADE:
White

TRADING UNIT SIZES:
5.0L / 7.0KG / 12.5L / 18.0KG



PROCESSING

APPLICATION PROCEDURE

Application with brush, roller or spray application.
Airless spraying results in higher nozzle wear.

Airless spraying

Spray angle: 50°; Nozzle: 0.019-0.021"; Spray pressure: 160-180 bar

COATING BUILD-UP

Prepare the substrate properly. See chapter "Substrates and their pre-treatment". 1 coat of paint

Apply undiluted or diluted with max. 5% water.

APPLICATION TEMPERATURE

At least +5°C for object and ambient temperature for the Processing and during drying.

PROCESSING INFORMATION

- Stir well before use.
- If the material is diluted too much, the characteristics can be impaired.
- Wet-on-wet coating is recommended to avoid the formation of stripes. When painting with a brush, the painted area should be well coated. Finally, roll out the surface in one direction after the last application.
- Observe sufficient drying time between coatings.

CONSUMPTION

Approx. 160 ml/m² per coat on smooth, slightly absorbent substrates. On rough substrates correspondingly more. Consumption may vary depending on the nature and structure of the substrate and the application method. Determine the exact consumption values by sample coating.

DILUTION

With max. 5% water.

DRYING TIME

At +20°C and 65% relative humidity:

Overpaintable after approx. 12 hours

These times change at lower temperatures and/or higher humidity.



Choose the colore!
Choose the life!



www.alpaintedura.ae

