

### Alvea. Your future, our view.

The distinctive feature of our Smart Retail approach is the seamless integration between the digital world and the physical experience.

The boundaries between online and offline dissolve, allowing customers to explore, discover, and purchase products in an engaging and informative context.

ALVEA is committed to providing a fully personalized experience.

Thanks to technology and data analysis, we can offer customers targeted suggestions and answers to their questions even before they are asked.

Our experts, always present in-store, will provide detailed information to guide customers in discovering all aspects of each individual product.



Interior wooden doors



Windows



Shading systems



Flooring and wall coverings

### alvea stores

MILAN

TURIN

ROME

FLORENCE

NAPLES

DOHA

DUBAI

RIYADH

alvea.it - info@alvea.it



natural line



### Casement doors and windows

#### Warmth and strength:


The warmth of wood and the solidity and durability of aluminium are combined in the Aluminium-Wood line. Systems integrated with the external side in aluminum available in unlimited finishes and the inner side covered by a thick layer of natural wood, to choose from various essences. The performance of this line is extraordinary.




### Sliding doors and windows

#### Zero maintenance:

Perfect sealing, resistance, non-deformability, sound insulation, water tightness, air-resistance, saltiness-resistance and aggressive atmospheric agents and zero maintenance. The thermal break guarantees maximum energy savings. High levels of safety are added to the anti-burglary performance, perfect opening and closing mechanics, anti-theft and home automation predisposition.

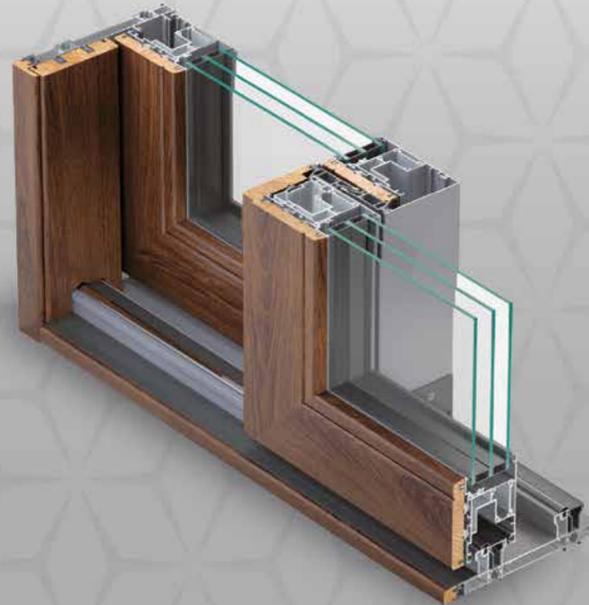

#### AELLE 100 STH




Telaio fisso Frame	Telaio mobile Sash	Spessore vetri Glass thickness
79 o 89 mm variabile in funzione della linea estetica depending on the aesthetic line	100 mm	da 26 mm a 59 mm variabile in funzione della linea estetica depending on the aesthetic line

Trasmittanza termica  
Thermal transmittance

Valore Uf 1,6-2,4 W/m<sup>2</sup>·K / Uf value 1,6-2,4 W/m<sup>2</sup>·K  
(Finestra 1 arda 1230 x 1480 mm; vetro Ug 0,6 W/m<sup>2</sup>·K, Psi 0,0031 W/m<sup>2</sup>·K)  
(1 casement window 1230 x 1480 mm; glass Ug 0,6 W/m<sup>2</sup>·K, Psi 0,0031 W/m<sup>2</sup>·K)

#### AELLE-S 190 STH



Telaio fisso Frame	Telaio mobile Sash	Spessore vetri Glass thickness	Peso massimo anta Maximum sash weight
190 mm	78 mm	da 26 mm a 48 mm	350 kg o 600 kg

Trasmittanza termica  
Thermal transmittance

Valore Uf 1,7-4,2 W/m<sup>2</sup>·K / Uf value 1,7-4,2 W/m<sup>2</sup>·K  
(Finestra 3000x2700 mm; Vetro Ug 0,6 W/m<sup>2</sup>·K, Psi 0,031 W/m<sup>2</sup>·K)  
(1 casement window 3000x2700 mm; glass Ug 0,6 W/m<sup>2</sup>·K, Psi 0,031 W/m<sup>2</sup>·K)